

L-BL2 N

Data sheet 2BL2 101

Compact circuit vacuum pump

IE3


General information


Elmo Rietschle vacuum pumps of the model range L-BL2 are Also known as the Elmo Rietschle "Pump in a Box", these portable units are oil free and air cooled. They include an L-BV liquid ring pump, industrial electric motor, discharge separator, seal water cooler and discharge air cooler. To install – simply connect the suction line and motor and fill the water tank – it's ready to go!

Maintenance and wear are minimal thanks to contact free compression and a built-in discharge air cooler. Additional features include: quiet operation, continuous duty design and suitability for humid environments.



Performance curves

Vacuum operation

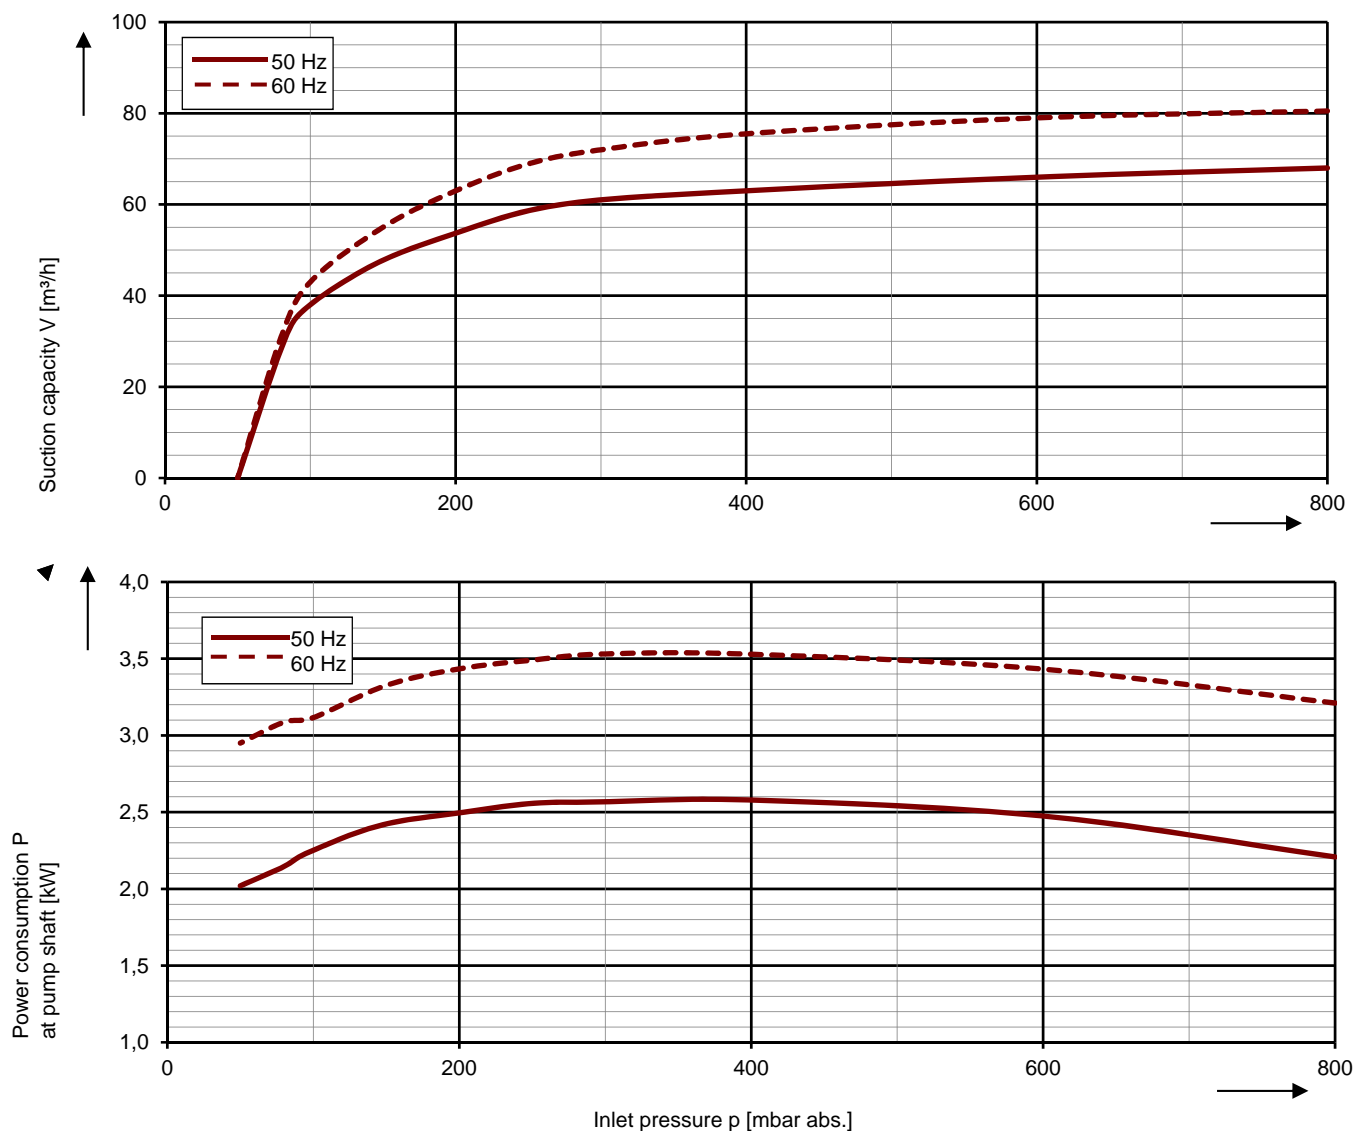

The characteristic curves are based on the evacuation of dry air and an intake temperature of 20 °C. At a suction pressure of 1013 mbar abs. (water as operating liquid) the characteristic curves will be achieved. The tolerance is $\pm 10\%$.

The motors are supplied as standard for the input voltage ranges of 50 and 60 Hz and for the protection category IP55.